

# OR601TWA rangehood

ID231008  
code OR601TWA

## 60cm retractable



<b>finish</b>	white enamel body, white front rail
<b>installation</b>	built into overhead cabinetry
<b>motor</b>	100 watt single shaded motor with impellor
<b>controls</b>	front mounted right
<b>speeds</b>	3 settings — OFF (telescopic deflector shut, LOW, MID, HIGH
<b>illumination</b>	two 40 watt SES tubular globes, separate on/off switch
<b>automation</b>	preset fan speed and light
<b>capacity</b>	210 cubic metres/hour net, 273 cubic metres/hour gross
<b>filter</b>	one-piece, 3-ply aluminium grease filter (removable)
<b>air extraction</b>	ducted or recirculated (125mm diameter pipe required)
<b>option</b>	activated charcoal filter, code CF3061,
<b>warranty</b>	two years parts and labour

### APPLICATION

Mounted above cooktop in cupboard, suspended from shelf in cabinetry cavity. Retractable front fascia rail is fully integrated into cupboard line when rangehood is not in use. Front rail is replaceable by decor strip.

### AUTOMATION

Preset fan speed and/or lights to operate automatically when rail is pulled outward. Manual override on fan and light.

### MAINTENANCE

Easy lift-out grease filter is washable; removable light diffuser for bulb access. All clean lines for wipe-over maintenance.

### PERFORMANCE

Highly-efficient air extraction of up to 210 cubic metres an hour net further enhanced by large catchment area when all-metal visor is telescoped outwards.

### QUIETNESS

37-53 dB. The motor/impellor encasement and flues are all smooth-walled to minimise air drag and hence noise, welded metal joints for no vibration.

### SAFETY

Thermal overload protector on motor; fire-retardant hardened metal and mesh. VO self-extinguishing polycarbonate for motor housing and internal flue.

### DUCTING

Ideally the extracted air is ducted direct to the atmosphere via the top exit. This direct ducting ensures maximum removal of the grease, oil particle-laden vapour and, importantly, the removal of the heat and odours, resulting in a more comfortable cooking environment. A collar is provided for the exit to fit 125mm round ducting, whether it be galvanised sheet piping, high temperature rated PVC or flexible tubing.

### RECIRCULATING

When the cooking vapours cannot be ducted, simply redirect the extracted and filtered air into the kitchen via a duct pipe through the overhead cabinetry. A more frequent inspection and cleaning of the grease filter is recommended.

### CHARCOAL FILTER

A purchasable accessory and easily fitted within the grease filter, it effectively diminishes cooking odours in the recirculation mode. These filters are not to be washed and are replaceable.

### WARRANTY

Two years parts and labour.


**omega**

# OR601TWA rangehood

ID231008  
code OR601TWA



## 60cm retractable

PLAN


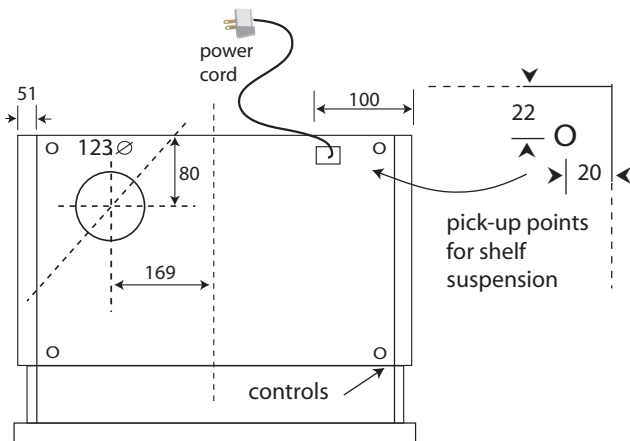


height	170mm
width	598mm
depth	retractable visor 300mm/485mm
packaged dimensions	60cm: 645mm x 390mm x 255mm = 0.65m <sup>3</sup>
net weight	60cm: 9.6kg
gross weight	60cm: 10.7kg
capacity	273m <sup>3</sup> /hr gross, 210m <sup>3</sup> /hr net
noise rating	37-53 dB
electrical supply	240 volt, 50 Hz
electrical connection	1.25m connected power cord with 3-pin suitable for standard 10 amp GPO
motor	single-shaded pole
wattage	motor: 100 watt light: 2 x 40 watt SES tubular globes total: 1800 watt

SIDE ELEVATION

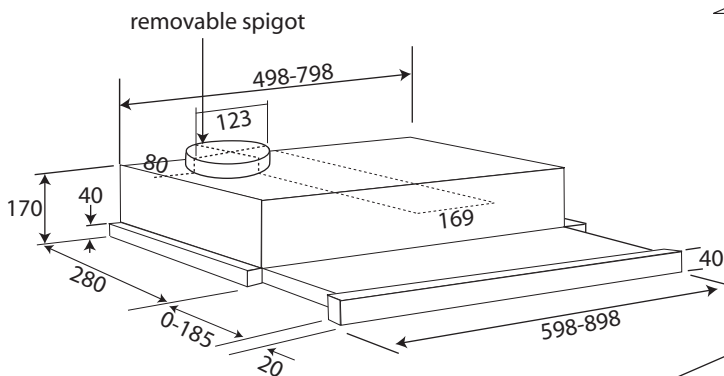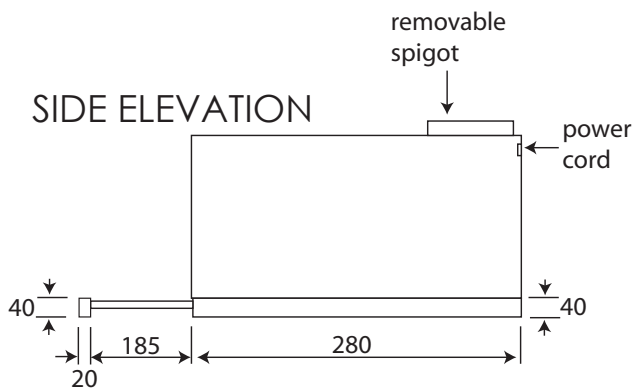

maximum current	1.0 amp
air exit aperture	123mm diameter for 125mm (5") dia duct pipe
supplied	<ul style="list-style-type: none"> <li>• template for mounting</li> <li>• spigot for duct pipe</li> <li>• screws</li> <li>• instructions for installation, operation and maintenance</li> </ul>

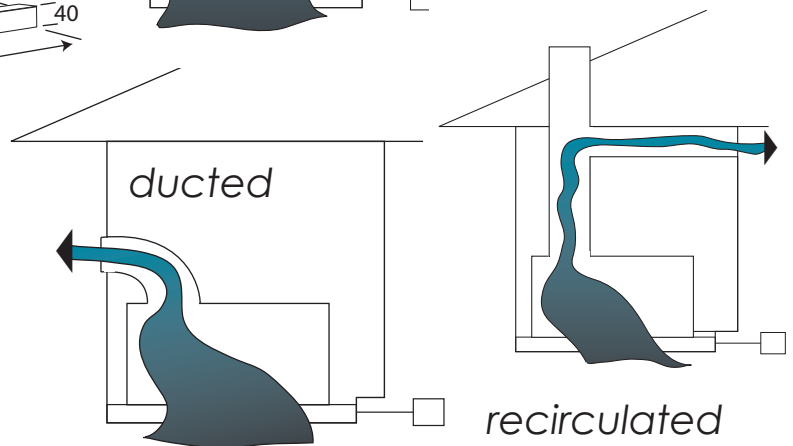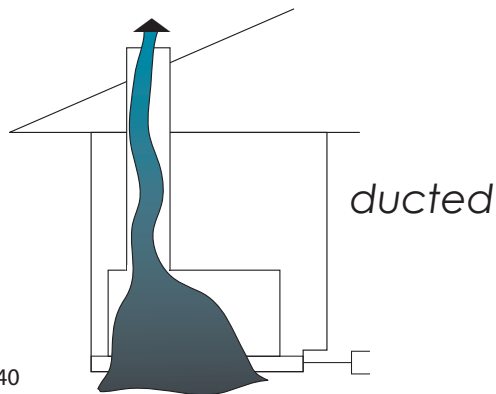

**NB: drawings are not to scale — they are to assist only**

air filtering options

**WARNING:** technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

**omega**