

# omega dishwasher

60cm fully integrated dishwasher\*

OFI603A



<b>finish</b>	supplied without pictured door
<b>installation type</b>	fully integrated – built in
<b>capacity</b>	14 place settings
<b>wash programs</b>	7
<b>warranty</b>	24 months parts and labour
<b>water</b>	4 star
<b>energy</b>	3 star



WATER RATING



ENERGY RATING




- \*This model does not come with the door and handle pictured
- \*This model is designed to be integrated using customers own panel and handle
- \*Please see user manual for integration instructions

FEATURE	DETAILS / BENEFITS										
can be integrated	designed to integrate with your kitchen cabinetry to give a modern contemporary style and look										
adjustable top basket (unloaded)	a height adjustable top basket allows you to fit varying sized plates in both the bottom and top baskets										
seven wash programs	<table> <tr> <td>quick 30min wash 40°C</td> <td>normal 55°C</td> <td>rinse 70°C</td> <td></td> <td></td> </tr> <tr> <td>glass wash 40°C</td> <td>pots intensive 65°C</td> <td>heavy 50°C</td> <td>soak</td> <td></td> </tr> </table>	quick 30min wash 40°C	normal 55°C	rinse 70°C			glass wash 40°C	pots intensive 65°C	heavy 50°C	soak	
quick 30min wash 40°C	normal 55°C	rinse 70°C									
glass wash 40°C	pots intensive 65°C	heavy 50°C	soak								
plate size	bottom basket allows up to 30cm plates										
triple filtration system	maintains wash performance and avoids bigger food particles re-entering the wash system										
rear fold down plate tines	adds loading flexibility by allowing bigger pots to be washed with ease										
fully flexible top basket with 4 adjustable cup racks and glass supports	wines glasses, mugs and cups can be washed with ease on this second tier rack with glass support										
quick wash	lightly soiled plates can be washed in only 30 minutes										

# omega dishwasher

60cm fully integrated dishwasher\*

OFI603A

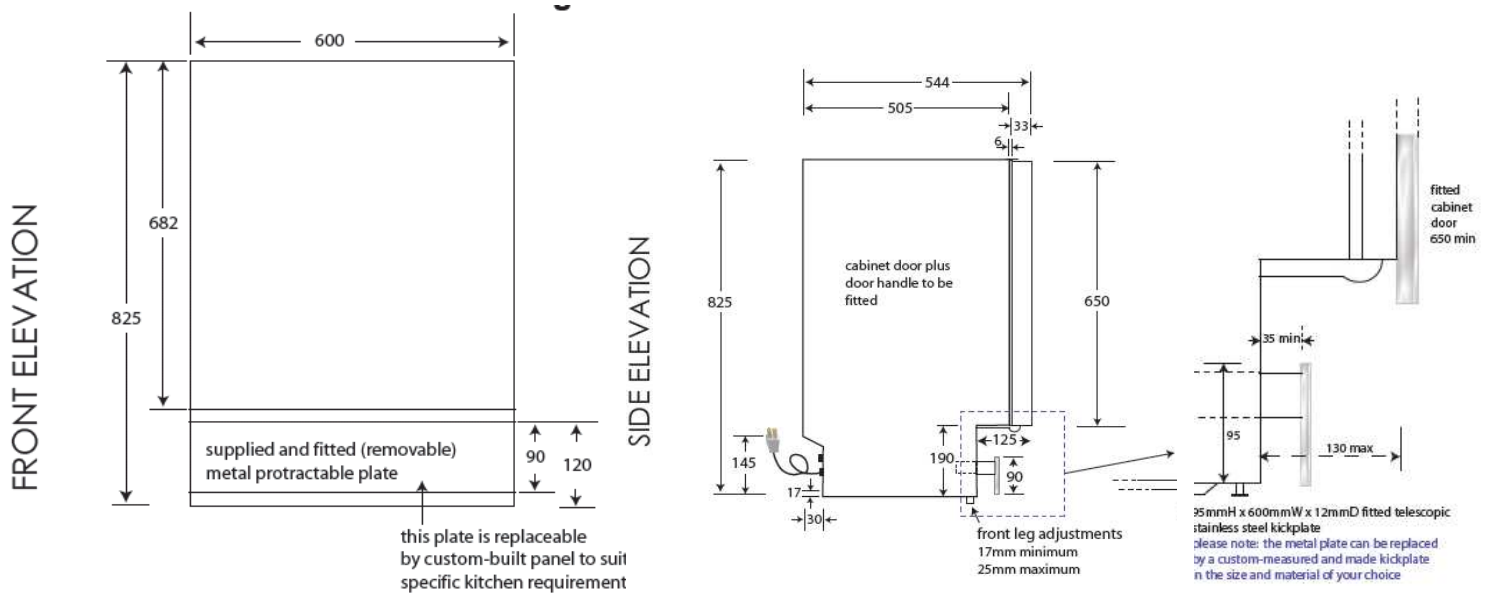

functionality	
place settings	14
height adjustable top basket	yes – unloaded adjustable
wash temps °C	4 – 40, 50, 55, 65
delayed start	1 - 24 hours
allowable plate size (bottom basket)	30 cm
allowable plate size (top basket)	21.5cm
drying efficiency	residual heat dry
safety	
lockable controls	no
flotation device	yes
AquaStop safety hose	no
additional program options	
half load option	no
DUALZONE	no
tablet wash	yes

product details	
overall dimensions HxWxD	825 x 600 x 544
installation type	fully integrated – built in
control	concealed
countdown display	no
noise	45dBA
weight (gross)	43kg
water	4 stars
energy	3 stars
connection	
power requirements	10 amp, 240v
water connection	cold water recommended
water pressure	400 to 1000 kpa
length of hose	2 meters
max water temp °C	60
warranty	
parts and labour warranty	24 months